




MAKINO

Makino S-56 With Nikken 5AX-201 Tilting Rotary Table

Turnkey Installation & Interface – Fanuc Control

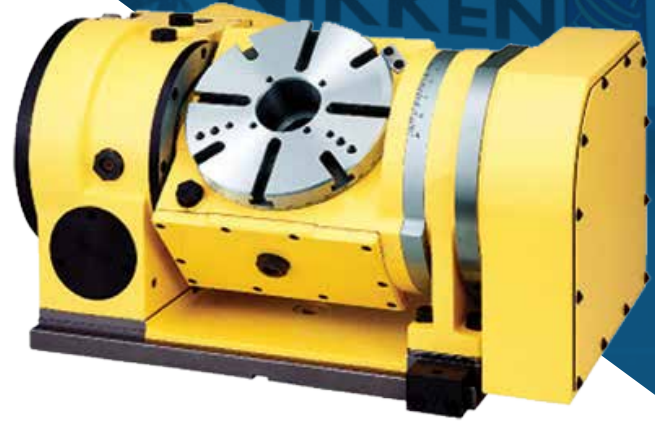

- Compact Body
- High Speed Rotation, High Durability and High Rigidity
- Powerful Brake System
- Ion Nitrided Worm Wheel & Worm Screw

SPECIFICATIONS:

Diameter of Faceplate:	Ø7.8" (200mm)
Diameter of Spindle Hole:	Ø2.36" x Ø1.97"
Center Height (90°):	7" (180mm)
Table Height (0°):	10.2" (260mm)
Clamping System:	Hydraulic
Min. Increment:	0.001°
Net Weight:	353 lbs

ROTARY AXIS:

Repeatability:	4 arc sec.
Clamping Torque:	433.6 ft lbs
Rotation Speed:	22.2 RPM
Total Reduction Ratio:	1/90

TILTING AXIS:

Repeatability:	6 arc sec.
Clamping Torque:	451.3 ft lbs
Rotation Speed:	16.6 RPM
Total Reduction Ratio:	1/120



- ✓ Reduce Setups & Cycle Time
- ✓ 5-Axis Contouring Capabilities
- ✓ Increase Part Accuracy & Productivity

Lyndex-Nikken is the only rotary table manufacturer to offer complete interface and installation on Fanuc Control.

WE USE THE HIGHEST QUALITY HARDWARE AND COMPONENTS:

- Genuine Fanuc Parts
- Genuine Fanuc Option Parameters
- Cut Resistant Waterproof Cabling
- Cable Management

FACTORY CLEAN INSTALLATION:

- Drive Installation
- Parameter Changes
- Communication Cables
- Fiber Optic Cables
- Bulkhead Cable Set
- External Cable Installation
- Table Installation
- Documentation



847.367.4800 | sales@lyndexnikken.com

www.lyndexnikken.com

Connect With Us!

Features and dimensions are subject to change without prior notice. For additional information, please contact us or see our complete Presetter Catalog.

Installation Process

STEP 1: ELECTRICAL CABLE SETUP


1. Mount cable kit and airline plate onto sheet metal
2. Plumb the electrical cables to the electrical cabinet

STEP 2: AMPLIFIER

1. Mount Fanuc amplifier and fiber optic cables
2. Set parameters to turn on additional axes

STEP 3: ROTARY TABLE SETUP

1. Install Rotary Table for fine tuning
2. Install brake clamp and unclamp buttons on control panel
3. Set up and programming training
4. Installation of SGI parameters

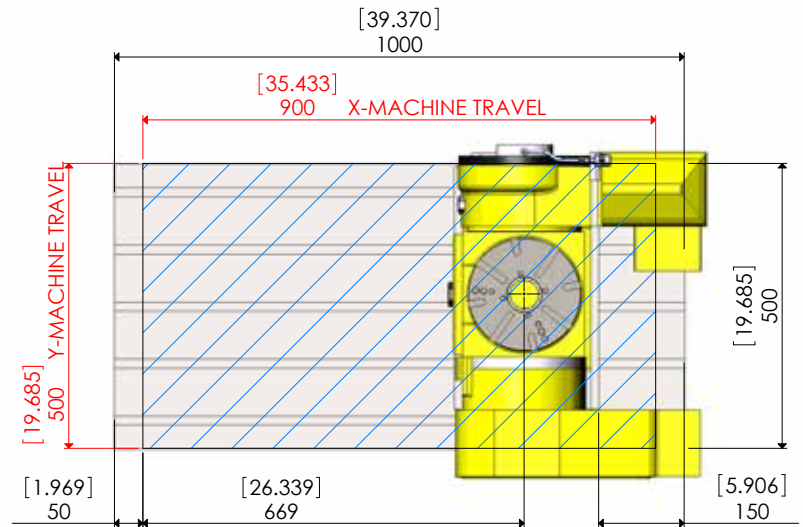

We guarantee a seamless integration with any Makino Machining Center and CNC control, whether a 4th or 5th axis interface is needed.

